

LUMINESCENT

Transform architecture through light

Revolutionary Finish

Experience brick facades that shift subtly from dawn to dusk with our innovative light-responsive technology. This premium glazed brick combines sophisticated aesthetics with proven durability, offering architects and property owners unprecedented creative freedom.

Design Features

- Exclusive coarse velour texture for distinctive aesthetics
- Dynamic iridescent finish that shifts with natural light
- Four sophisticated cool tones for contemporary designs
- Unique surface quality that enhances architectural vision

Technical Features


- Three-sided application eliminates separate quoin ordering
- Maximized surface texture ensures reliable mortar adhesion
- Factory-controlled quality standards
- Weather-resistant, low-maintenance finish

Size Options

Modular, Norman, Ambassador, Economo Modular, Utility, and Monarch. Also available in Modular, Norman, Economo Modular, and Utility 5/8" Flat Back Thin Brick.


BELDEN
THE BELDEN BRICK COMPANY

The Standard of Comparison Since 1885




Discover more at www.beldenbrick.com


PREMIUM COLORS

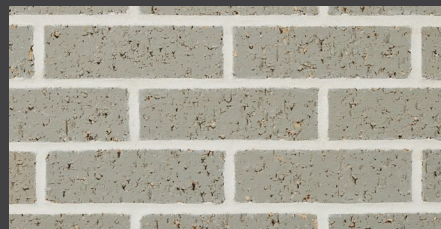

Aluminum Coarse Velour

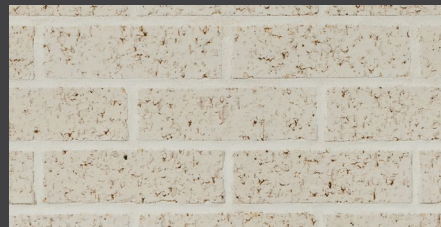

Frost Coarse Velour

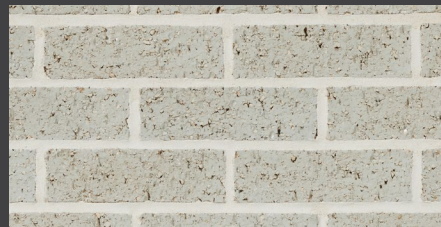

Morning Mist Coarse Velour



Twilight Coarse Velour



Due to variations in printing, color and texture may vary from the actual product.
©2025 The Belden Brick Company. All rights reserved. | LUM-001-01-25

LUMINESCENT

Discover more at www.beldenbrick.com

Aluminum Coarse Velour



Type	Face
Color	Gray
Texture	Coarse Velour
Plant	Plant 8
Manufacturing Method	Extruded
Coating	Luminescent
Series	Luminescent

Sizes

Sizes	Width	Height	Length	Unit/Sq Ft
Modular	3 5/8" 92mm	2 1/4" 57mm	7 5/8" 194mm	6.86
Norman	3 5/8" 92mm	2 1/4" 57mm	11 5/8" 295mm	4.57
Ambassador	3 5/8" 92mm	2 1/4" 57mm	15 5/8" 397mm	3.43
Economo Modular	3 5/8" 92mm	3 5/8" 92mm	7 5/8" 194mm	4.50
Utility	3 5/8" 92mm	3 5/8" 92mm	11 5/8" 295mm	3.00
Monarch	3 5/8" 92mm	3 5/8" 92mm	15 5/8" 397mm	2.25
Modular 5/8 Flat Back	5/8" 16mm	2 1/4" 57mm	7 5/8" 194mm	6.86
Economo Modular 5/8 Flat Back	5/8" 16mm	3 5/8" 92mm	7 5/8" 194mm	4.50
Norman 5/8 Flat Back	5/8" 16mm	2 1/4" 57mm	11 5/8" 295mm	4.57
Utility 5/8 Flat Back	5/8" 16mm	3 5/8" 92mm	11 5/8" 295mm	3.00

Aluminum Coarse Velour



Specs

Standards / Value	FACE BRICK C216	FBS
	THIN BRICK C1088	TBS

Size	
Avg. Comp. (PSI)	16,100
Avg. 24 Hr. Cold Water Absor.	3.00
Avg. 5 Hr. Boil Absor.	4.20
Avg. Saturation Coeff.	0.73
Avg. Initial Rate Absor.	6.50
Test Report	 Download

Size	
Avg. 24 Hr. Cold Water Absor.	3.00
Avg. 5 Hr. Boil Absor.	4.20
Avg. Saturation Coeff.	0.73
Test Report	 Download

Cleaning Recommendation	Belden Brick recommends using Safety Klean® to clean this product. Alternatively, EaCo Chem NMD 80® can be used to clean any of our brick.	
-------------------------	--	--

Frost Coarse Velour



Type	Face
Color	White
Texture	Coarse Velour
Plant	Plant 8
Manufacturing Method	Extruded
Coating	Luminescent
Series	Luminescent

Sizes

Sizes	Width	Height	Length	Unit/Sq Ft
Modular	3 5/8" 92mm	2 1/4" 57mm	7 5/8" 194mm	6.86
Norman	3 5/8" 92mm	2 1/4" 57mm	11 5/8" 295mm	4.57
Ambassador	3 5/8" 92mm	2 1/4" 57mm	15 5/8" 397mm	3.43
Economo Modular	3 5/8" 92mm	3 5/8" 92mm	7 5/8" 194mm	4.50
Utility	3 5/8" 92mm	3 5/8" 92mm	11 5/8" 295mm	3.00
Monarch	3 5/8" 92mm	3 5/8" 92mm	15 5/8" 397mm	2.25
Modular 5/8 Flat Back	5/8" 16mm	2 1/4" 57mm	7 5/8" 194mm	6.86
Economo Modular 5/8 Flat Back	5/8" 16mm	3 5/8" 92mm	7 5/8" 194mm	4.50
Norman 5/8 Flat Back	5/8" 16mm	2 1/4" 57mm	11 5/8" 295mm	4.57
Utility 5/8 Flat Back	5/8" 16mm	3 5/8" 92mm	11 5/8" 295mm	3.00

Frost Coarse Velour



Specs

Standards / Value	FACE BRICK C216	FBS
	THIN BRICK C1088	TBS
Size		
Avg. Comp. (PSI)	12,980	
Avg. 24 Hr. Cold Water Absor.	3.80	
Avg. 5 Hr. Boil Absor.	5.30	
Avg. Saturation Coeff.	0.73	
Avg. Initial Rate Absor.	10.00	
Test Report	 Download	
Cleaning Recommendation	Belden Brick recommends using Safety Klean® to clean this product. Alternatively, EaCo Chem NMD 80® can be used to clean any of our brick.	

Morning Mist Coarse Velour



Type	Face
Color	Gray
Texture	Coarse Velour
Plant	Plant 8
Manufacturing Method	Extruded
Coating	Luminescent
Series	Luminescent

Sizes

Sizes	Width	Height	Length	Unit/Sq Ft
Modular	3 5/8" 92mm	2 1/4" 57mm	7 5/8" 194mm	6.86
Norman	3 5/8" 92mm	2 1/4" 57mm	11 5/8" 295mm	4.57
Ambassador	3 5/8" 92mm	2 1/4" 57mm	15 5/8" 397mm	3.43
Economo Modular	3 5/8" 92mm	3 5/8" 92mm	7 5/8" 194mm	4.50
Utility	3 5/8" 92mm	3 5/8" 92mm	11 5/8" 295mm	3.00
Monarch	3 5/8" 92mm	3 5/8" 92mm	15 5/8" 397mm	2.25
Modular 5/8 Flat Back	5/8" 16mm	2 1/4" 57mm	7 5/8" 194mm	6.86
Economo Modular 5/8 Flat Back	5/8" 16mm	3 5/8" 92mm	7 5/8" 194mm	4.50
Norman 5/8 Flat Back	5/8" 16mm	2 1/4" 57mm	11 5/8" 295mm	4.57
Utility 5/8 Flat Back	5/8" 16mm	3 5/8" 92mm	11 5/8" 295mm	3.00

Morning Mist Coarse Velour



Specs

Standards / Value	FACE BRICK C216	FBS
	THIN BRICK C1088	TBS
Size		
Avg. Comp. (PSI)	16,100	
Avg. 24 Hr. Cold Water Absor.	3.00	
Avg. 5 Hr. Boil Absor.	4.20	
Avg. Saturation Coeff.	0.73	
Avg. Initial Rate Absor.	6.50	
Test Report	 Download	
Size		
Avg. 24 Hr. Cold Water Absor.	3.00	
Avg. 5 Hr. Boil Absor.	4.20	
Avg. Saturation Coeff.	0.73	
Test Report	 Download	
Cleaning Recommendation	Belden Brick recommends using Safety Klean® to clean this product. Alternatively, EaCo Chem NMD 80® can be used to clean any of our brick.	

Twilight Coarse Velour



Type	Face
Color	Gray
Texture	Coarse Velour
Plant	Plant 8
Manufacturing Method	Extruded
Coating	Luminescent
Series	Luminescent

Sizes

Sizes	Width	Height	Length	Unit/Sq Ft
Modular	3 5/8" 92mm	2 1/4" 57mm	7 5/8" 194mm	6.86
Norman	3 5/8" 92mm	2 1/4" 57mm	11 5/8" 295mm	4.57
Ambassador	3 5/8" 92mm	2 1/4" 57mm	15 5/8" 397mm	3.43
Economo Modular	3 5/8" 92mm	3 5/8" 92mm	7 5/8" 194mm	4.50
Utility	3 5/8" 92mm	3 5/8" 92mm	11 5/8" 295mm	3.00
Monarch	3 5/8" 92mm	3 5/8" 92mm	15 5/8" 397mm	2.25
Modular 5/8 Flat Back	5/8" 16mm	2 1/4" 57mm	7 5/8" 194mm	6.86
Economo Modular 5/8 Flat Back	5/8" 16mm	3 5/8" 92mm	7 5/8" 194mm	4.50
Norman 5/8 Flat Back	5/8" 16mm	2 1/4" 57mm	11 5/8" 295mm	4.57
Utility 5/8 Flat Back	5/8" 16mm	3 5/8" 92mm	11 5/8" 295mm	3.00

Twilight Coarse Velour



Specs

Standards / Value	FACE BRICK C216	FBS
	THIN BRICK C1088	TBS
Size		
Avg. Comp. (PSI)	16,100	
Avg. 24 Hr. Cold Water Absor.	3.00	
Avg. 5 Hr. Boil Absor.	4.20	
Avg. Saturation Coeff.	0.73	
Avg. Initial Rate Absor.	6.50	
Test Report	 Download	
Size		
Avg. 24 Hr. Cold Water Absor.	3.00	
Avg. 5 Hr. Boil Absor.	4.20	
Avg. Saturation Coeff.	0.73	
Test Report	 Download	
Cleaning Recommendation	Belden Brick recommends using Safety Klean® to clean this product. Alternatively, EaCo Chem NMD 80® can be used to clean any of our brick.	